



**Better FTTx,
Better Life.**

FCST-Single Layer Wrap Around Closure System

M:+86 18720624696

Email:sales@fcst.com

Tel:+86-21-38726791 38726792

Web:www.fcst.com www.micro-duct.com



Product Overview

FCST-Single Layer Wrap Around Closure System is very simple to install, whether the microduct is overhead, ducted or buried. Simply wrap the rubber sheath around the bundle and insert the protruding part into its corresponding opening to form a sealed package (Designed by adopting gel - sealing technology.). Then use cable ties to secure the closure in place. This closure is ideal for providing additional protection and is ideal for FTTH applications.

Product Advantages

- Stretchable rubber jacket.
- Fast and easy installation.
- Re-openable supplied with cable ties.
- All Dielectric design with no metal parts.
- Designed by adopting gel - sealing technology.
- Provides protection for thin wall microducts, duct bundles and connector when exposed.


Product Specifications

Construction	Description
Material	EPDM
Bundle Diameter	20mm up to 40mm (With multiple ducts and connectors)
Length	396.5mm 15.610in
Width	220mm 8.661in
Height	15.8mm 0.622in
Colour	Black UV Body
Operating Temperature	-25°C to 60°C
Protection Level	IP67


Installation Guide



Step 1
Wrap around the tube bundle



Step 2
Pull the tabs through the loops

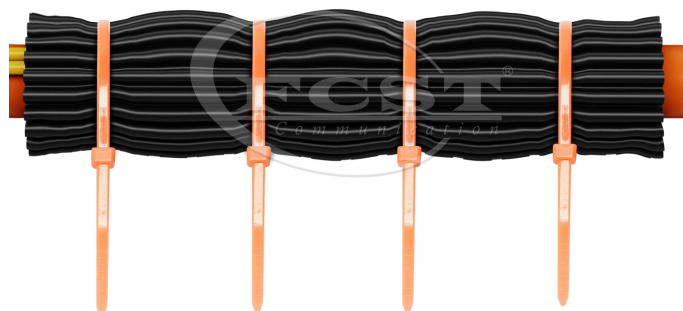

Step 3
Secure in place with cable ties

Related Products



**Telecom Manhole
Chamber**



**Divisible Duct
Sealing-40~63mm(HT)**




Micro Duct Connector



Fiber Blowing Machines



Fiber Cable Solution Technology Co.,Ltd.

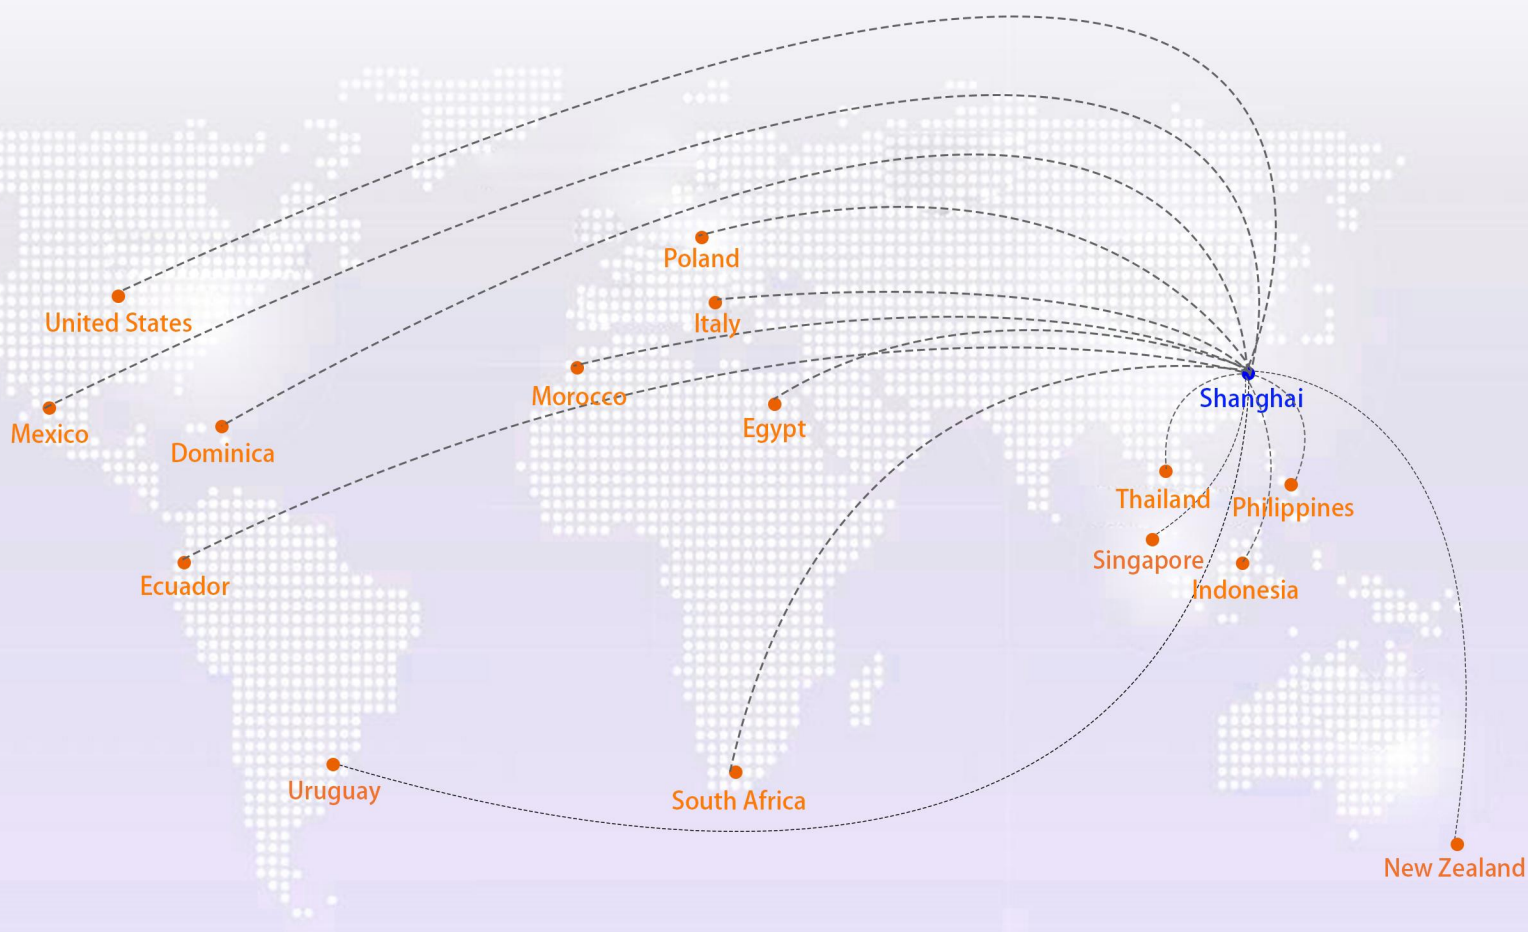

Overseas Agency

 www.fcst.com www.micro-duct.com



FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durability.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicated to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441.

Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793