



Better FTTx, Better Life.



August, 2025

Technical Information

FCST-ERPUB

Microduct End Stop Connector

M:+86 18720624696

Email:sales@fcst.com

Tel:+86-21-38726791 38726792

www.fcst.com

www.micro-duct.com





Microduct End Stop Connector

These connectors were developed to connect microducts with each other. Our system enables an easy, fast connection and disconnection of the microduct. The connectors' robust construction resistance to high pressure forces, allowing them to be used in direct buried (DB) applications. The transparent body enables easy visual inspection of the cable within the connector.



- For 3-27 mm Microducts.
- Easy “ push-in ” installation.
- Crystal clear transparent body.
- 95% of the material is made of non-metal.
- Tested in accordance to EN 50411-2-8:2009.
- Locking rings to prevent accidental removal of connector.



IP68



Product Specifications

Construction	Description
Tube To Connector	HDPE Microduct(DB DI TW)
Fluid	Air with blowing system
Working Pressure	20 bar
Burst Pressure	25 bar
Estimated Life	25 years
Protection Class	IP68
Water Ingress Test	0.5 bar during 168 hours
Installation Temperature	-15°C to +45°C
Operation Temperature	-15°C to +45°C
Transport and Storage Temperature	-15°C to +45°C
Insertion Force	Size ≤ 12mm, ≤ 50 N Size ≥ 14mm, ≤ 120 N
Impact Resistance	1.5J
According To Standards	CEI EN 50411-2-8, EN 50411-2-5, EN 61300, EN 61753-1, EN 60068-2-10, EN 60794-1-2:2003




Standards

Construction


- EN 60529:IP68
- EN 61300-2-26: Salt Mist
- EN 61300-2-33: Re-entries
- EN 61300-2-10: Crush Resistance
- EN 61300-3-1: Visual Appearance
- EN 61300-2-4: Microduct Retention
- EN 61300-2-34: Chemical Resistance
- EN 50411-2-8:Annex E:Insertion Force
- EN 61386-22: Glow Wire Test at 750°C
- EN 60794-1-2: 2003,Method E4:Impact
- EN 50411-2-8:Annex D:Installation Test
- EN 61300-2-22: Change of Temperature
- EN60794-1-2 Method E1. Tensile Strength
- EN 61300-2-38: 2006,Method B:Pressure Loss
- EN 50411-2-8:Annex C: High Pressure Resistance
- EN 61300-2-23: 1997,Method 2:Water Immersion
- EN 61386-24: Conduit Systems Buried Underground
- EN 61300-2-38:2006, Method A:Sealing Performance

Product Material

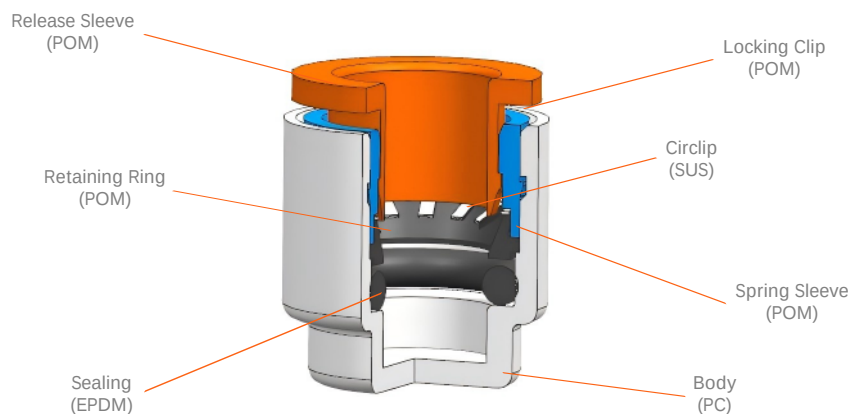



Ordering Information



Model	D (mm)	A (mm)	L (mm)	Weight(g)
ERPUB3	3	11.0±0.2	16.2±0.5	1.66±0.1
ERPUB4	4	11.0±0.2	16.2±0.5	1.66±0.1
ERPUB5	5	13.5±0.2	14.3±0.5	1.86±0.1
ERPUB6	6	13.5±0.2	14.3±0.5	1.86±0.1
ERPUB7	7	15.2±0.2	19.2±0.5	2.6±0.1
ERPUB8	8	15.2±0.2	19.2±0.5	2.4±0.1
ERPUB8.5	8.5	15.2±0.2	19.2±0.5	2.4±0.1
ERPUB10	10	17.5±0.2	20.4±0.5	3.3±0.1
ERPUB12	12	21.5±0.2	23.5±0.5	5.85±0.1
ERPUB1/2(12.7)	1/2(12.7)	21.5±0.2	23.5±0.5	5.85±0.1
ERPUB14	14	23.5±0.2	24.5±0.5	6.70±0.1
ERPUB15	15	25.3±0.2	25.8±0.5	7.80±0.1
ERPUB16	16	25.3±0.2	25.8±0.5	7.80±0.1
ERPUB18	18	32.7±0.3	27.8±0.5	15.05±0.2
ERPUB20	20	32.7±0.3	27.8±0.5	14.85±0.2
ERPUB22	22	40.0±0.3	36.5±0.5	-
ERPUB25	25	40.0±0.3	36.5±0.5	-
ERPUB27	27	46.5±0.3	40.3±1.0	-
ERPUB1/8	1/8	11±0.2	16.2±0.5	-
ERPUB3/16	3/16	13.5±0.2	14.3±0.5	1.86±0.1
ERPUB1/4	1/4	13.5±0.2	14.3±0.5	1.86±0.1
ERPUB5/16	5/16	15.2±0.2	19.2±0.5	2.4±0.1
ERPUB3/8	3/8	17.5±0.2	20.4±0.5	3.3±0.1

*Note: For other sizes, please contact the sales department.

Accessories Optional



Locking Clip



DB Cover



Ordering Information



LOGO&Color
(Spring Sleeve、Release Sleeve、 Locking Clip)



Packing
(Packing Bag, Inner Box, Outer Box、 label)

Related Products



Telecom Manhole Chamber



Divisible Duct Sealing



Marker Ball




Fiberblowing Machines



Better FTTx, Better Life.

Fiber Cable Solution Technology Co.,Ltd.

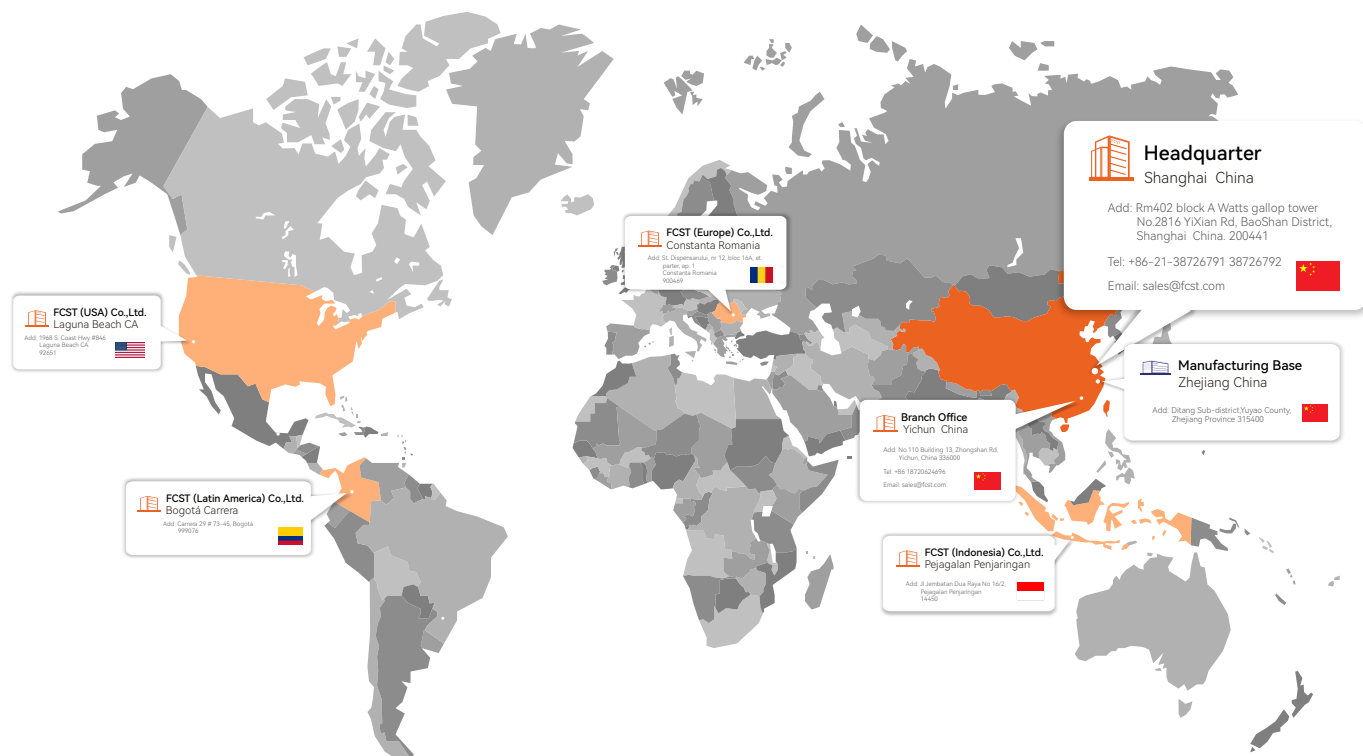

FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durability.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicated to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441.
Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793

www.fcst.com www.micro-duct.com

