



Better FTTx, Better Life.



August, 2025

Technical Information

FCST-TH-SMC03

SMC Telecom Manhole Chamber

M:+86 18720624696
Email:sales@fcst.com
Tel:+86-21-38726791 38726792

www.fcst.com

www.micro-duct.com





Telecom Manhole Chamber

FCST-TH-SMC03 Telecom Manhole Chamber is meticulously engineered to offer comprehensive protection, storage, equipment installation, and maintenance solutions for the underground placement of optical fiber splice boxes and cable products. This product boasts not only high stability, an extended service life, and exceptional pressure resistance, but also facilitates easy assembly.



- Excellent corrosion and weather resistance.
- Good electrical insulation and flame retardancy.
- Depth can be stacked according to requirements.
- Lightweight design using SMC composite materials.
- Complies with EN124 Standard .(B125 (12.5T)/C250 (25T))
- Prefabricated structure reduces on-site construction costs.
- Internal Dimensions: 1400*400*583mm(55.119"x15.749"x22.953")
- Transverse and vertical cross stiffeners are arranged around the outer side of the shaft, also be closely combined with the rammed soil layer. It is not easy to move and loosen after rolling.



EN124



Product Specifications

| Construction | Description |
|---------------------------------|-------------------------|
| Executive Standard | EN124 |
| Material | SMC |
| Manhole Cover Load Grade | B125(12.5T) C250(25T) |
| Length | 1400.00mm 55.119in |
| Width | 400.00mm 15.749in |
| Depth | 583.00mm 22.953in |
| Weight | 118kg(1 Layer) |
| Flame Retardant Grade | V0 |
| Environmental Requirements LOGO | Meet ROHS Available |
| Working Temperature | -40°C~+65°C |
| Storage Temperature | -40°C~+70°C |
| Service Life | 30 years |



Product Size

| External Size(L*W*D) | Internal Dimensions(L*W*D) | Manhole Cover Load Grade |
|---|---|---------------------------------|
| 1520*520*642mm (59.843"x20.473"x25.276") | 1400*400*583mm (55.119"x15.749"x22.953") | B125(12.5T)/C250(25T)/D400(40T) |
| | | |

UNIT:MM

Product Application




Note : The practical application of this Composite Manhole Chamber, covering many fields such as municipal administration, electric power, electricity, water, road administration, and drainage.

On each side of the product. The size of the drill hole can be adjusted at the construction site according to the actual size of the HDPE Silicon Pipe/HDPE Micro-duct.



Ordering Information

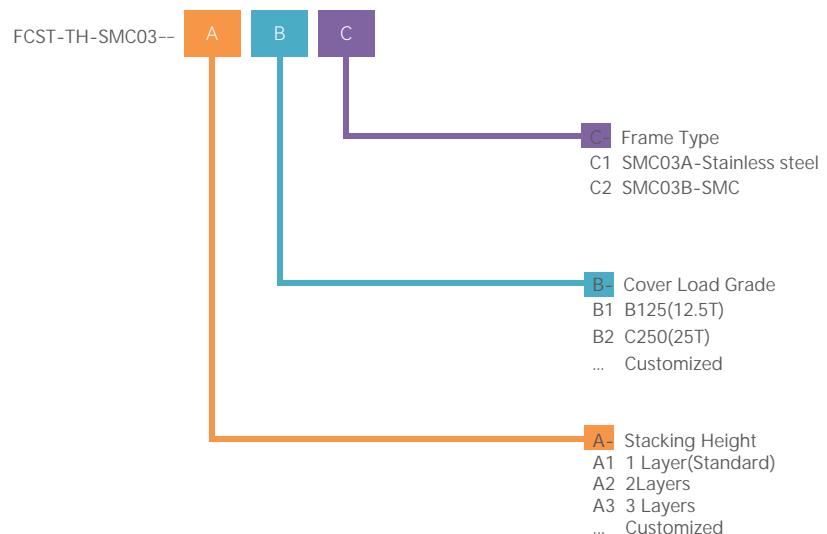

*Note: The specified model is determined based on optional configurations. For example: FCST-TH-**SMC03**--**A1-B1-C1**.

Accessories Optional



Optional-1 FOSC Fixed Frame



Optional-2 FOSC Fixed Frame



Optional-3 FCST-Cross Cable Rack



Optional-4 Manhole Ladder

Related Products



Fiber Optic Splice Closure



Fiber Optic Cable



Micro Duct Connector




Micro-duct



Better FTTx, Better Life.

Fiber Cable Solution Technology Co.,Ltd.

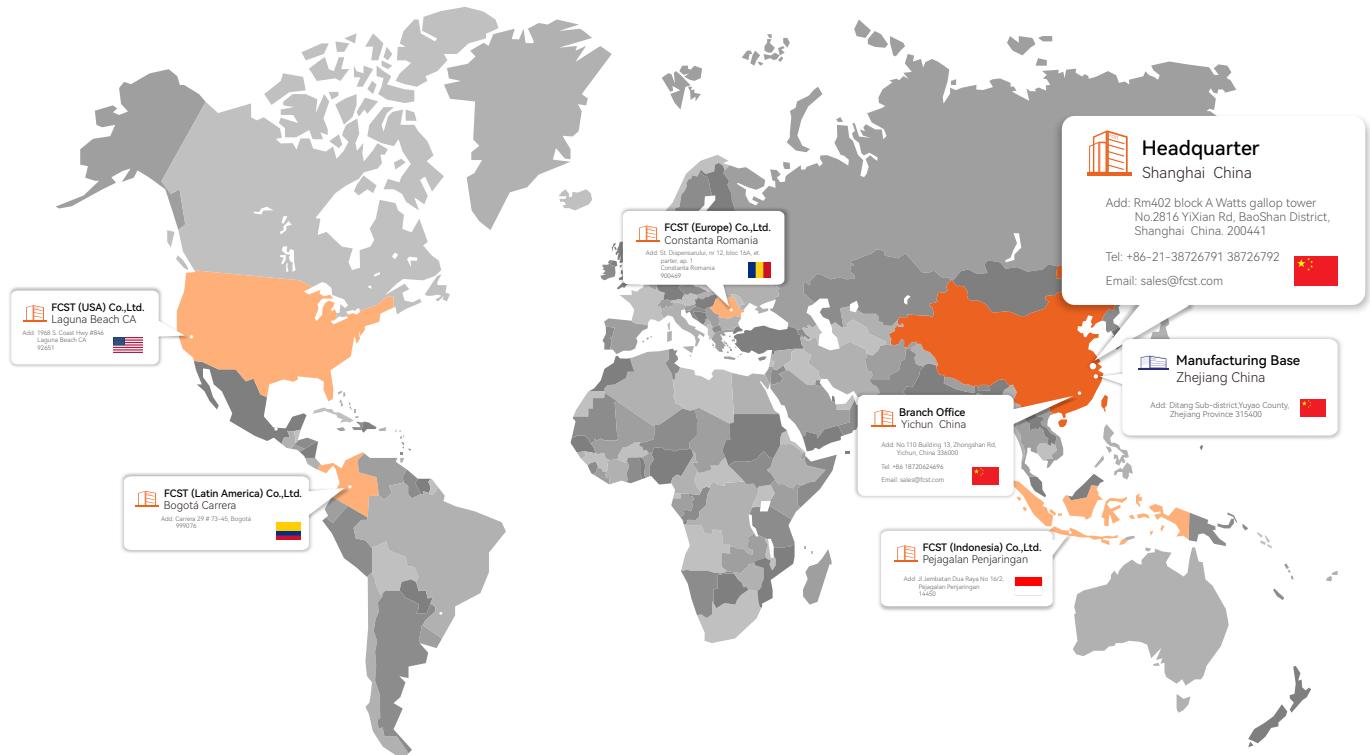

FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durability.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicated to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441.
Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793

www.fcst.com www.micro-duct.com

