



Better FTTx, Better Life.



October , 2025

Technical Information

# FCST-CBB Cable Blowing Bullet

M:+86 18720624696  
Email:sales@fcst.com  
Tel:+86-21-38726791 38726792

[www.fcst.com](http://www.fcst.com)

[www.micro-duct.com](http://www.micro-duct.com)





## Cable Blowing Bullet

Brass end caps shall be mounted on the cable end before blowing the micro cable into the micro duct. The end cap forms a rounded tip that facilitates blowing through duct joints. They also prevent air from penetrating through the open cable end into the cable. These end caps are extra slim to enable blowing into slim micro ducts. An inner thread makes them easy to mount on the cable tip. The end caps can be re-used.




- Re-useable.
- Prevents cable damage.
- Safe mounting on cable tip.
- Threaded for easy mounting.
- Applicable to 1.2~16mm micro cables.
- Improves cable blowing performance.
- Rounded tip that facilitates blowing of micro cables.



### Product Specifications

Construction	Description
Material	Brass
Inner Diameter	1.2,1.7,2.0,2.7,3.0,3.5,4.5,6,8,9,10,12,14,16mm
Insertion Type	Threaded

### Ordering Information

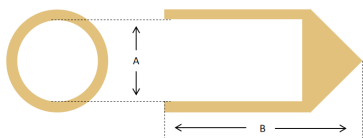


Model	A-Inner Diameter (mm)	B- Length(mm)	Weight (g)	Thread Diameter
FCST-CBB-1.2mm	Φ1.2	7	0.02	--
FCST-CBB-1.7mm	Φ1.7	7	0.02	--
FCST-CBB-2.0mm	Φ2.0	7	0.02	--
FCST-CBB-2.7mm	Φ2.7	7	0.02	--
FCST-CBB-3.0mm	Φ3.0	7	0.02	--
FCST-CBB-3.5mm	Φ3.5	9	0.2	--
FCST-CBB-4.0mm	Φ4.0	9	0.2	--
FCST-CBB-5.0mm	Φ5..2~5.4	20.25	5.0	M6
FCST-CBB-6.0mm	Φ6.9~7.1	20.32	7.5	M8
FCST-CBB-8.0mm	Φ8.6~8.9	20.48	10.6	M10
FCST-CBB-9.0mm	Φ8.6~8.9	19.96	9.8	M10
FCST-CBB-10.0mm	Φ10.6~10.8	20.26	12.0	M12
FCST-CBB-12.0mm	Φ12.7~13	20.37	14.7	M14
FCST-CBB-14.0mm	Φ14.7~15	20.34	17.7	M16
FCST-CBB-16.0mm	Φ16.8~17	20.22	10.9	M18



Better FTTx, Better Life.

## Fiber Cable Solution Technology Co.,Ltd.

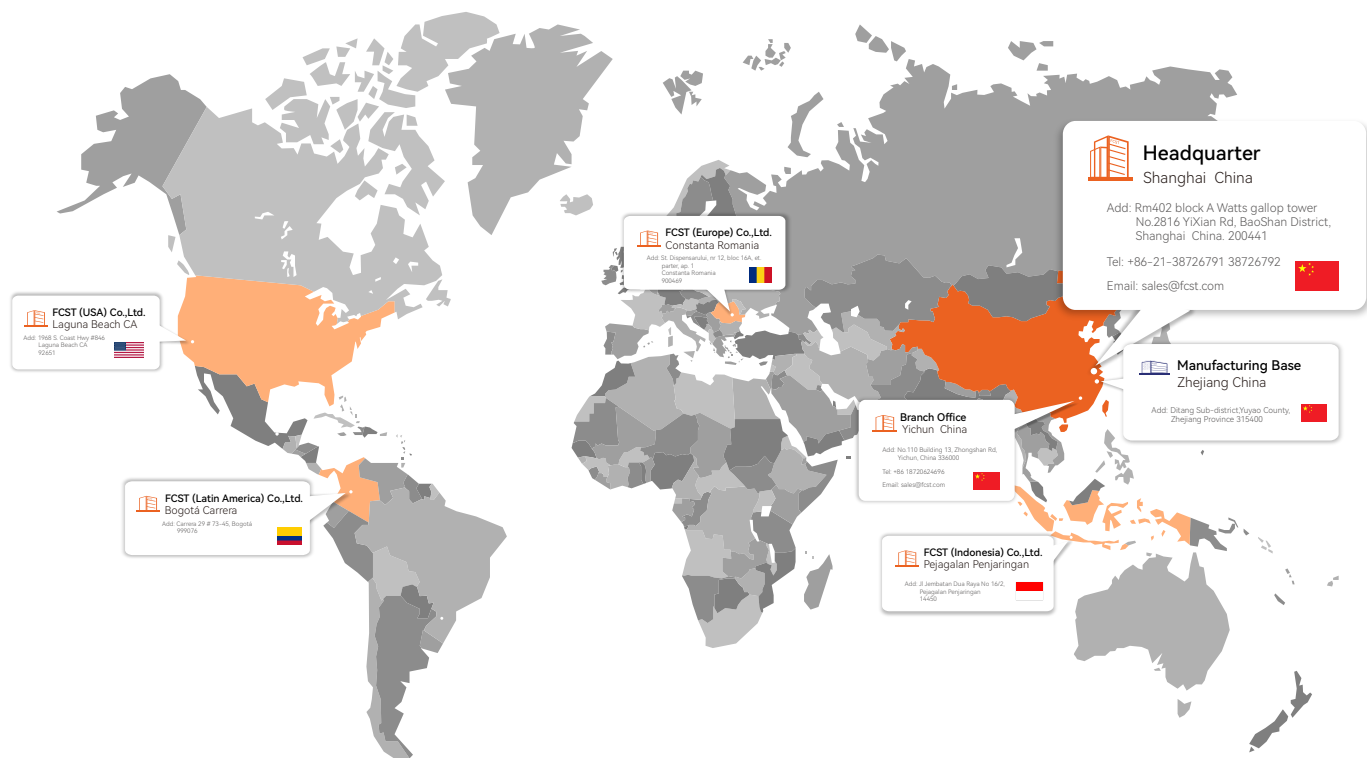

### FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durability.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicated to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441.  
Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793

[www.fcst.com](http://www.fcst.com) [www.micro-duct.com](http://www.micro-duct.com)

